Montážny návod Strong výsuvné koše

Bočné výsuvné koše Strong do úzkej skrinky 150–300 mm a spodné koše 300 / 400 mm. Návod výrobcu na montáž výsuvu a koša do skrinky – guľôčkový výsuv (s tlmením, Push, bez tlmenia) aj skrytý výsuv s tlmením.

Prehľad





Kôš	Výsuv	Strana návodu
Bočný kôš 150 / 200 mm	skrytý s tlmením (Ľ / P)	2
Bočný kôš 150 / 200 mm	guľôčkový (tlmenie, Push, bez)	3
Bočný kôš 250 / 300 mm	guľôčkový s tlmením	4
Spodný kôš 300 / 400 mm	skrytý s tlmením	5
Samotný dvojkôš 150 / 200 mm	bez výsuvu	2 (zoznam dielov)

Min. rozmery skrinky a polohu výsuvu nájdete na výkresoch výrobcu na jednotlivých stranách.

Obsah


- Bočný kôš 150 / 200 mm – skrytý a guľôčkový výsuv
- Bočný kôš 250 / 300 mm s guľôčkovým výsuvom
- Spodný kôš 300 / 400 mm

Manual of Side pull out basket


CODE	description	Potos	QTY(pcs)	CODE	description	Potos	QTY(pcs)	CODE	description	Potos	QTY(pcs)	CODE	description	Potos	QTY(pcs)
A		basket	1	B		concealed slide	1	C		Connector	2	D		M4x8 screw	4
E		M5x10 screw	4	F		M5X16 screw	2	G		M4 screw	16	H		sperator	4
I		mat	2	J		Ball bearing slide	1	K		connector	4	L		connector	4
M		M4x12 screw	4												

1.Installation of Concealed soft close slide


①Fix B by G on the cabinet as shown:

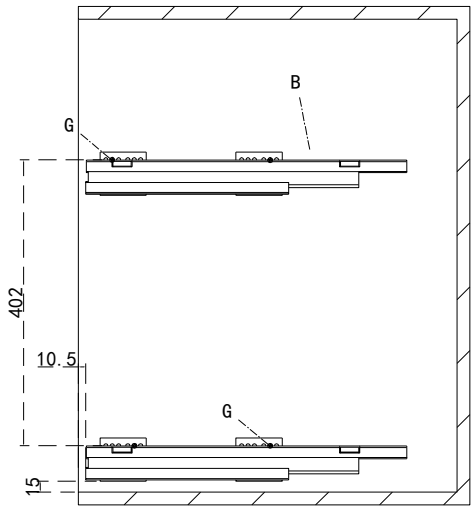

②Connect B with D and K by AB as shown:

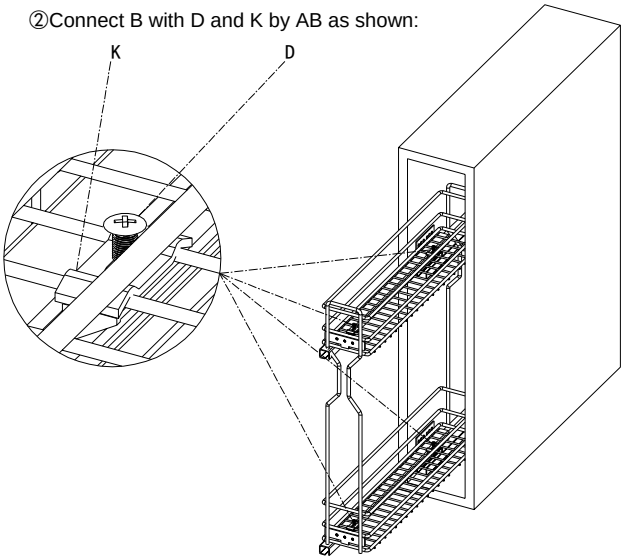


③Fix C by G on the door as shown:

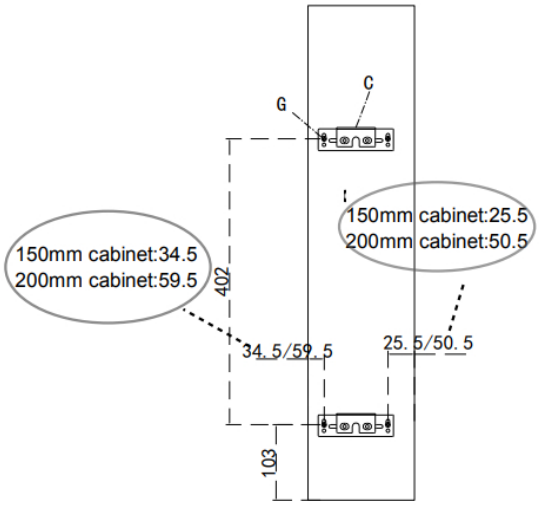

④Connect A with C by E & F as shown:

Done!

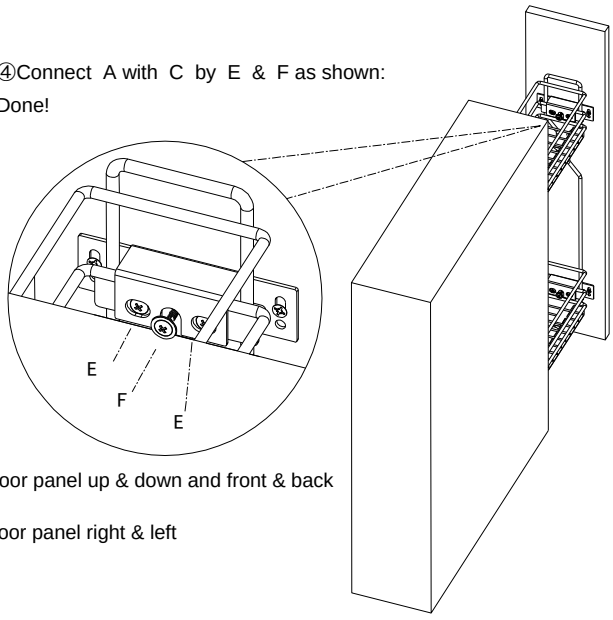


E:adjust the door panel up & down and front & back


F:adjust the door panel right & left

2. Installation of Ball bearing normal slide


①Disassemble Slide J to two parts J1 & J2 andfix J 2 on the cabinet's side panel as shown:

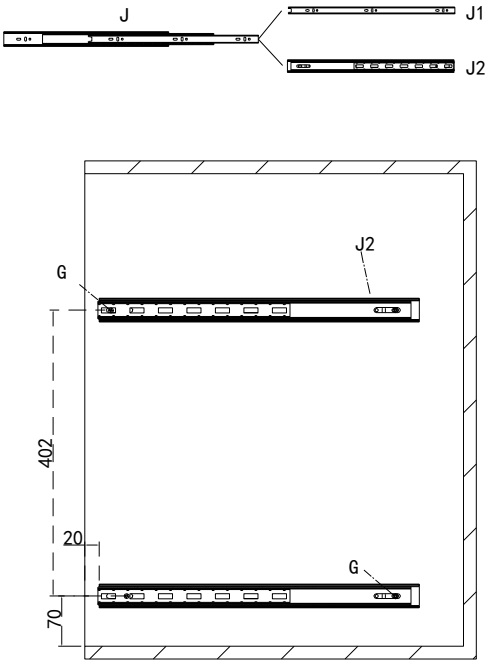


②Tighten L and J1 on the Basket A byM as shown:

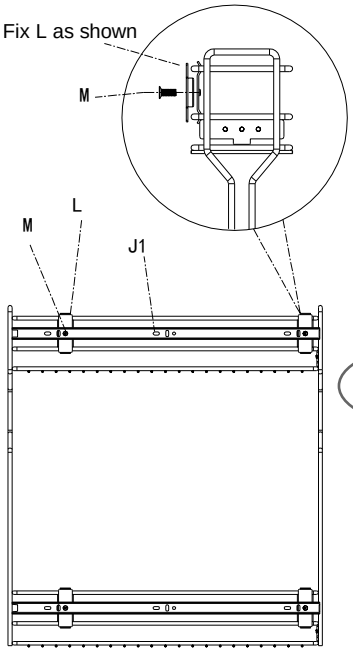


③Fix C on the door by G as shown:

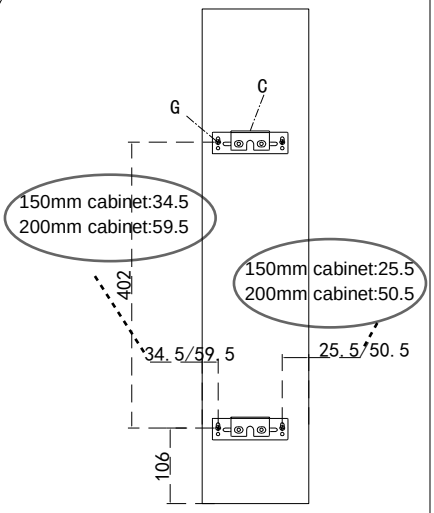

④Assemble J1 into J2 and pull & open the basket for times to insure the slide in theright po sition.

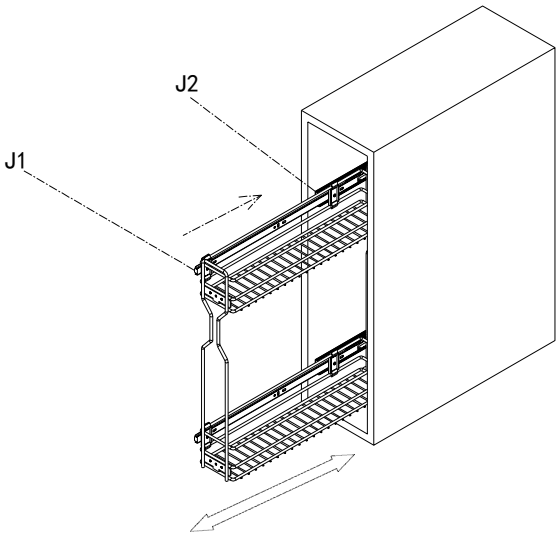


⑤Connect A with C by E & F as shown: Done!

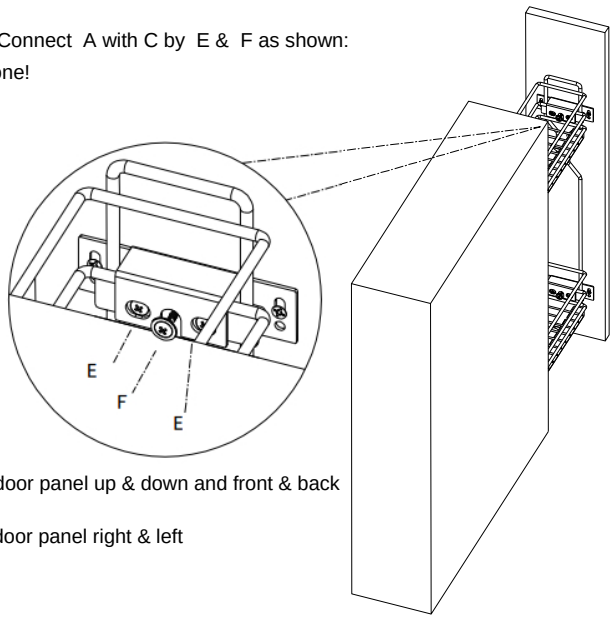


E:adjust the door panel up & down and front & back


F:adjust the door panel right & left


STRONG

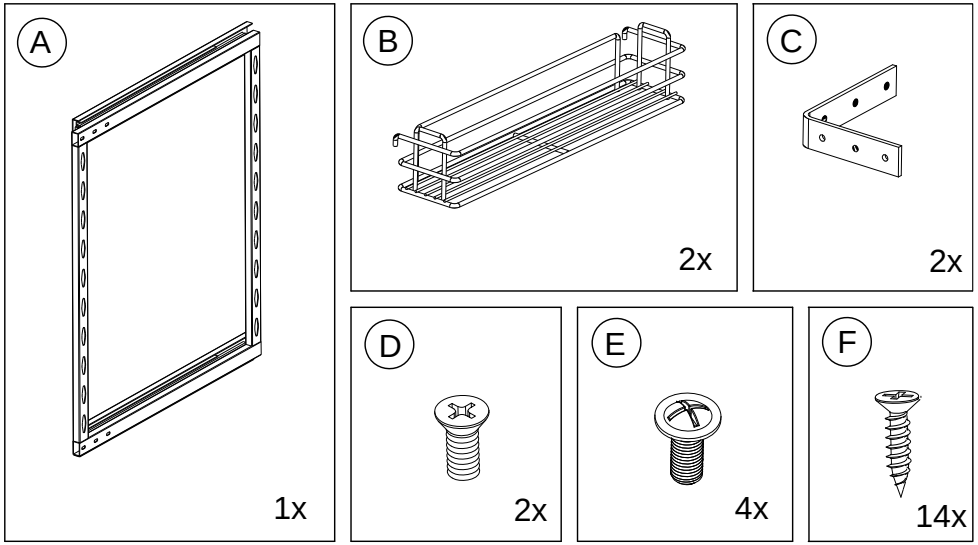


	B	LW
398685	200	164
398686	250	214
398687	300	264

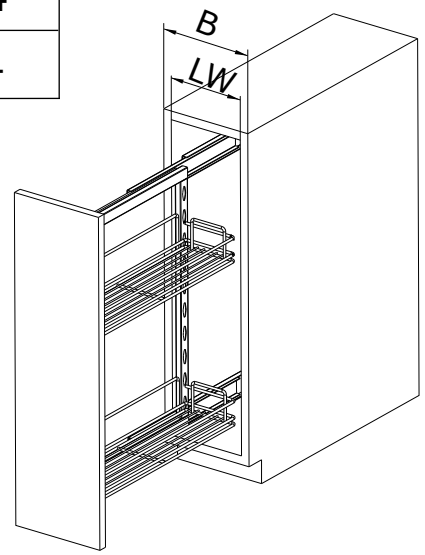

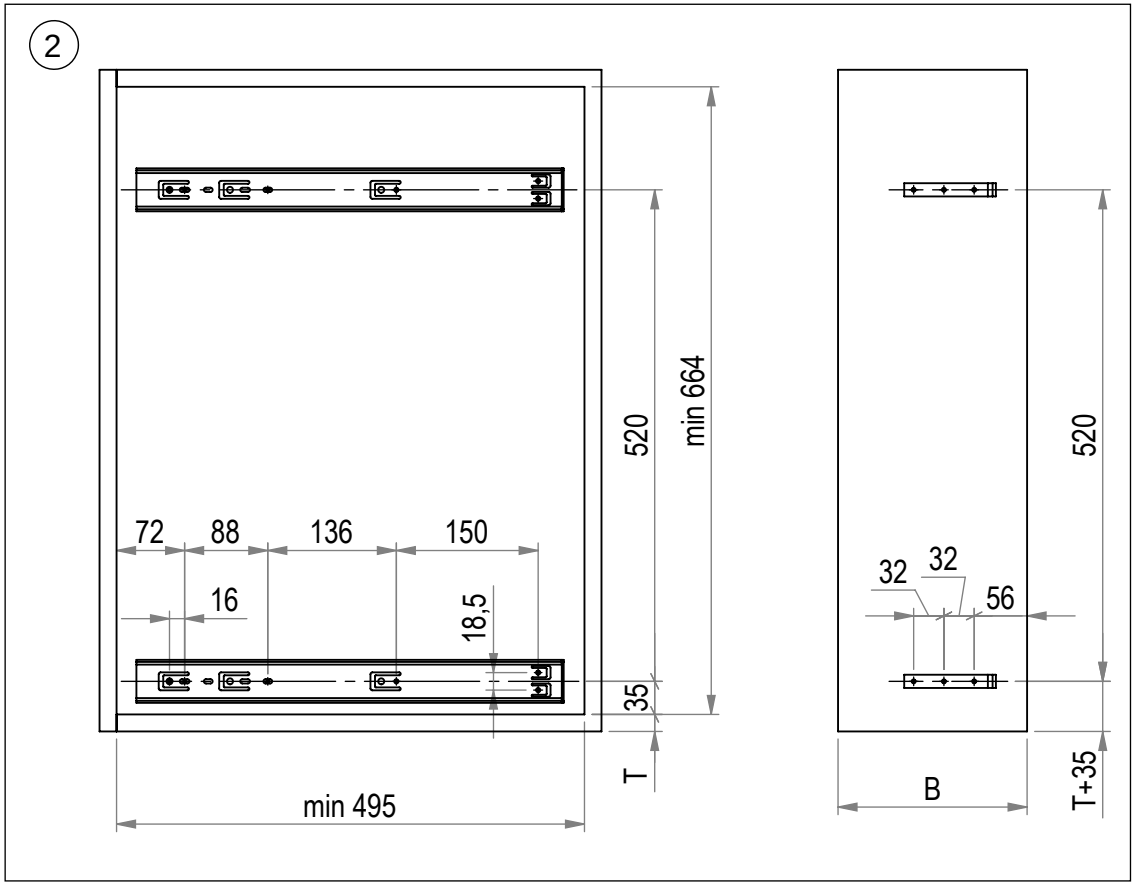

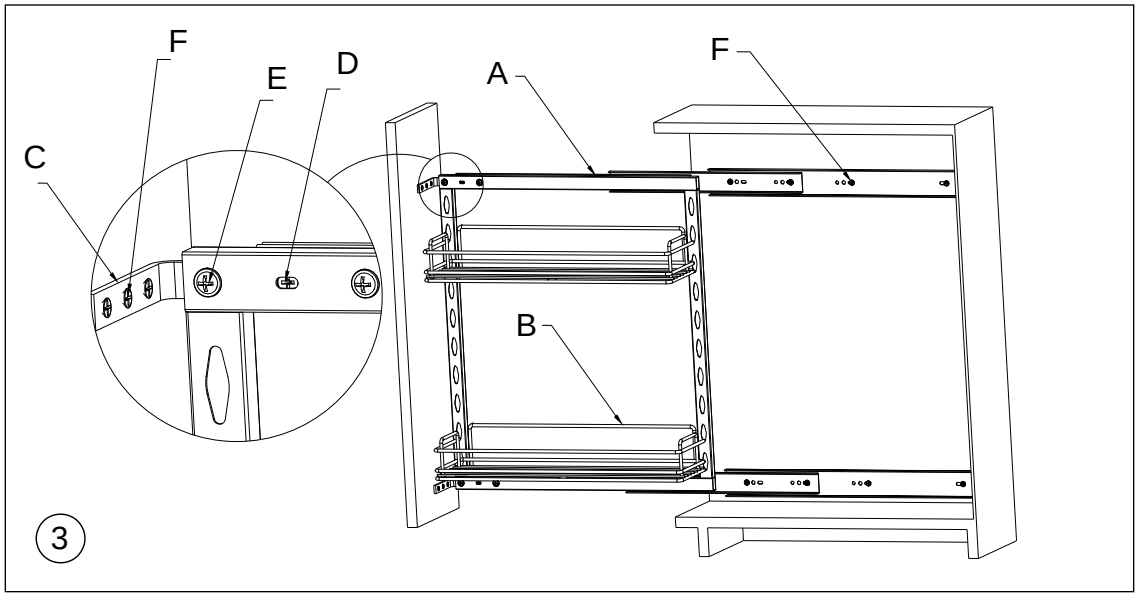


Manual of pull out bottom mounted basket


Photo	Description	QTY(pcs)	Photo	Description	QTY(pcs)	Photo	Description	QTY(pcs)
	M4X16	16		Base	1		M5X6	2
	Connector	2		Basket	1			

1. Fix with screw as shown.


Intalling basket base in the middle of the cabinet

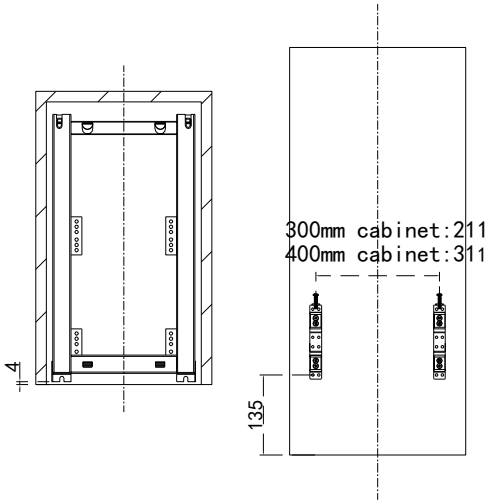

2. Adjust panel's position and fix it with screwas shown.

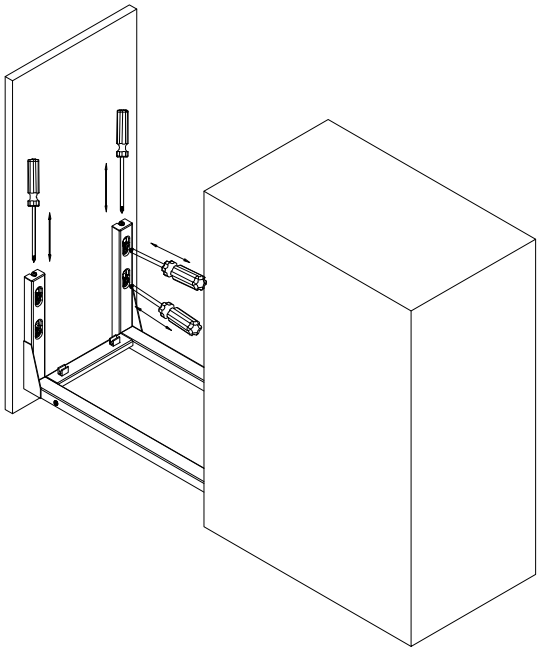

3. Fixing basket as shown.

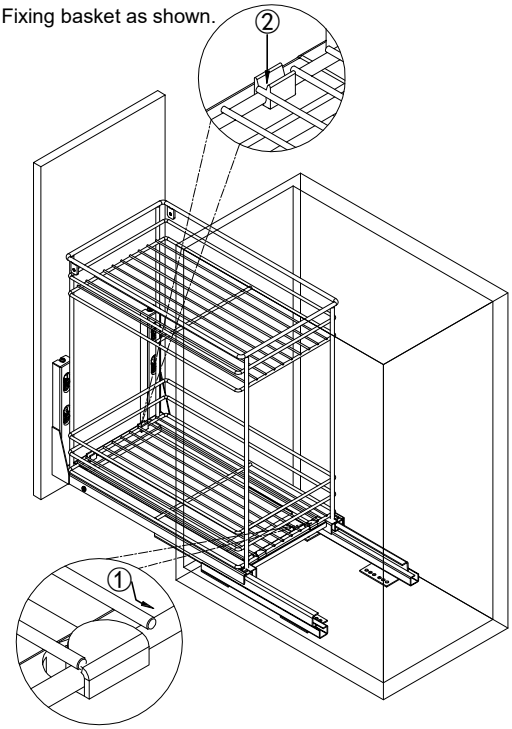

4. Fix the slice as show. Be sure slide moving smoothly.

